



INOX 100N-120-140


WHAT IS IT

Self-priming centrifugal pump for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks for transferring liquids and emptying tanks; used in medium sized industrial applications and for gardening.

MAIN USES

 water supply and pressurization for irrigation of gardens and small cultivations


 Water supply and pressurization for domestic and residential installations

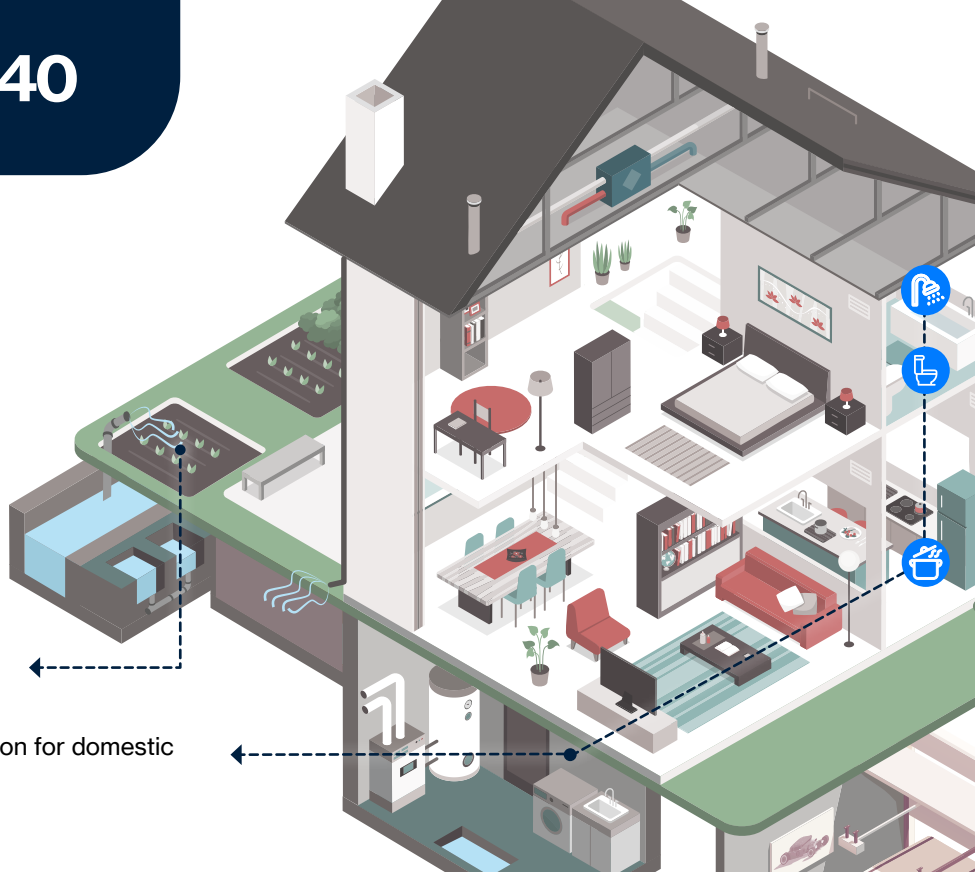

SPECIFICATIONS

Pump Body	Stainless steel AISI 304
Motor bracket	Aluminium
Impeller	Noryl®
Mechanical seal	Ceramic-Graphite
Motor shaft	Stainless steel AISI 416
Liquid temperature	0-50 °C
Operating pressure	Max 8 bar
Insulation class	F
Suction-delivery pump fitting	G 1" threaded F

APPLICATIONS

	1 STOREY	2 STOREYS	3 STOREYS
	INOX 100N	INOX 100N	INOX 140
	INOX 100N	INOX100N	INOX 140
	INOX 100N	INOX 140	-
	INOX 140	INOX 140	-



PLUS & PERFORMANCE



New self-priming system






Increased range of models






Better performance




INOX 100N

			
m^3/h	0,6	2,4	3,8
l/min	10	40	63,3
$H (m)$	42,3	29,6	21

INOX 120

			
m^3/h	0,6	2,4	3,8
l/min	10	40	63,3
$H (m)$	47,4	33,7	24,3

INOX 140

			
m^3/h	0,6	2,4	3,8
l/min	10	40	63,3
$H (m)$	53,6	38	29