


WHAT IS IT

Peripheral positive displacement pump with side suction for small household systems and simple industrial applications; characterised by a considerable ratio between performance and required output; frontal brass insert avoiding the risk of blockage.

MAIN USES



Water supply and pressurization for domestic and residential installations

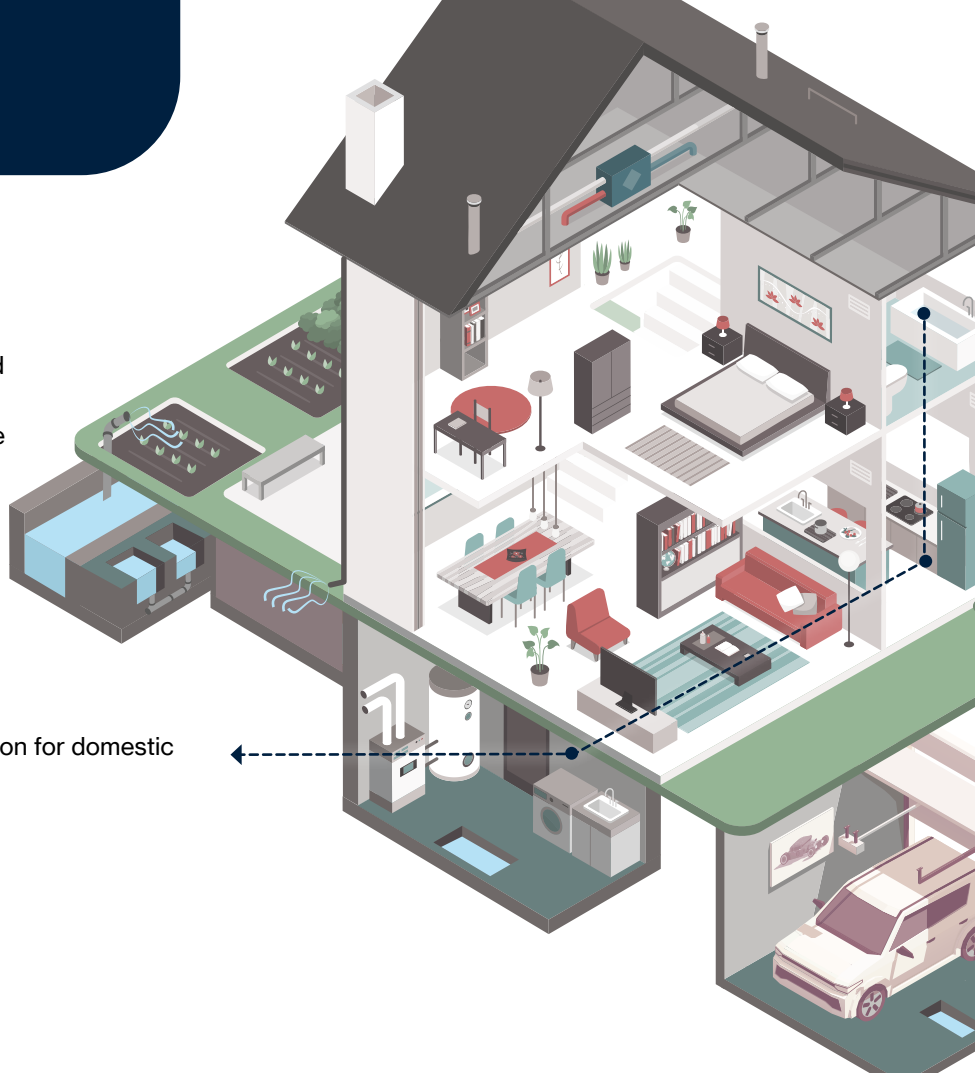

SPECIFICATIONS

Pump Body	Cast iron and brass
Motor bracket	Cast iron
Impeller	Brass
Mechanical seal	Ceramic-Graphite
Motor shaft	Stainless steel AISI 416
Liquid temperature	0-90 °C
Operating pressure	Max 8 bar
Insulation class	F

PLUS & PERFORMANCE



Motor shaft in AISI 416



High pressure at low flow



Low consumption