


## WHAT IS IT

Peripheral positive displacement pump with side suction for small household systems and simple industrial applications; characterised by a considerable ratio between performance and required output; frontal brass insert avoiding the risk of blockage.

## MAIN USES



Water supply and pressurization for domestic and residential installations

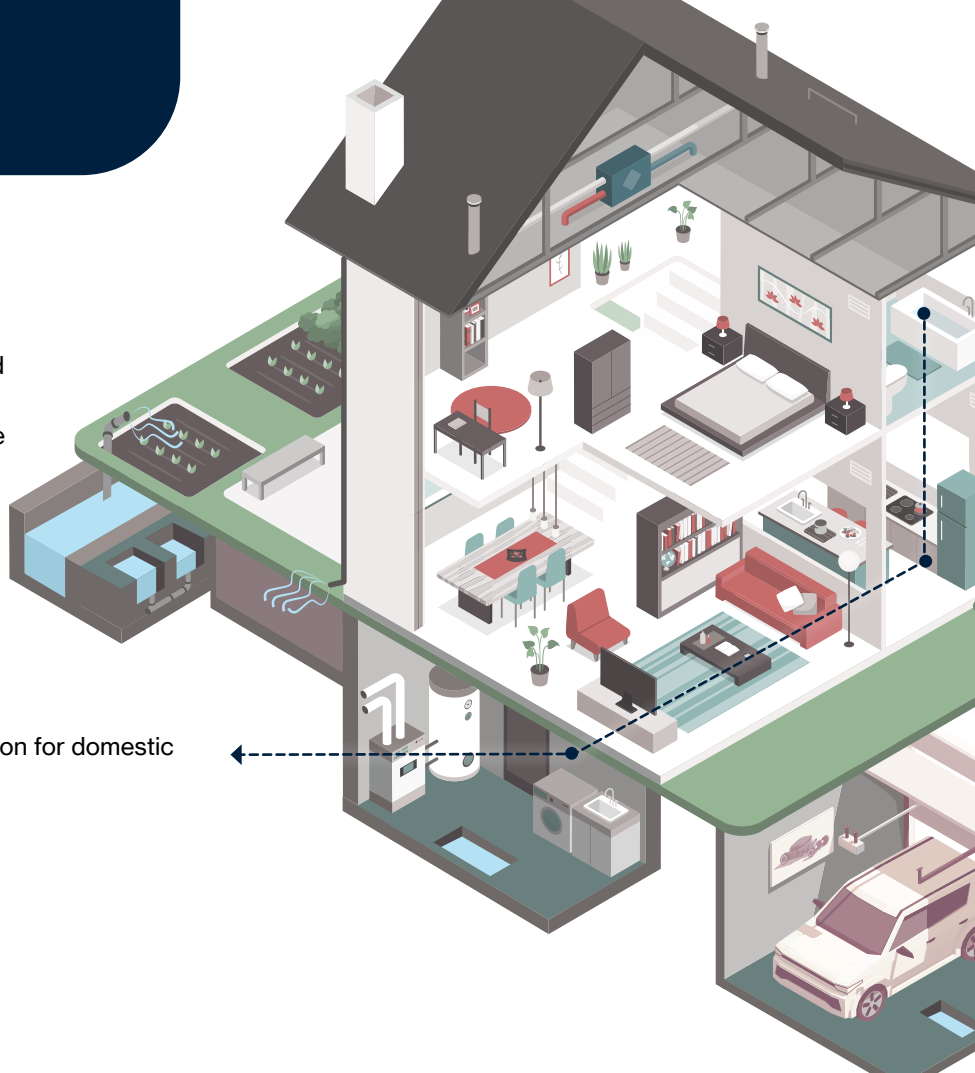

## SPECIFICATIONS

<b>Pump Body</b>	Cast iron and brass
<b>Motor bracket</b>	Cast iron
<b>Impeller</b>	Brass
<b>Mechanical seal</b>	Ceramic-Graphite
<b>Motor shaft</b>	Stainless steel AISI 416
<b>Liquid temperature</b>	0-90 °C
<b>Operating pressure</b>	Max 8 bar
<b>Insulation class</b>	F

## PLUS & PERFORMANCE



Motor shaft in AISI 416



High pressure at low flow



Low consumption