

WHAT IS IT

Self-priming centrifugal pump with external ejector (convertible) 2" and 4"; for water supplies (even if mixed with gas) in small household systems, when connected to autoclave tanks, an automatic pressurisation system comes.


MAIN USES



water supply and pressurization for irrigation of gardens and small cultivations



Water supply and pressurization for domestic and residential installations

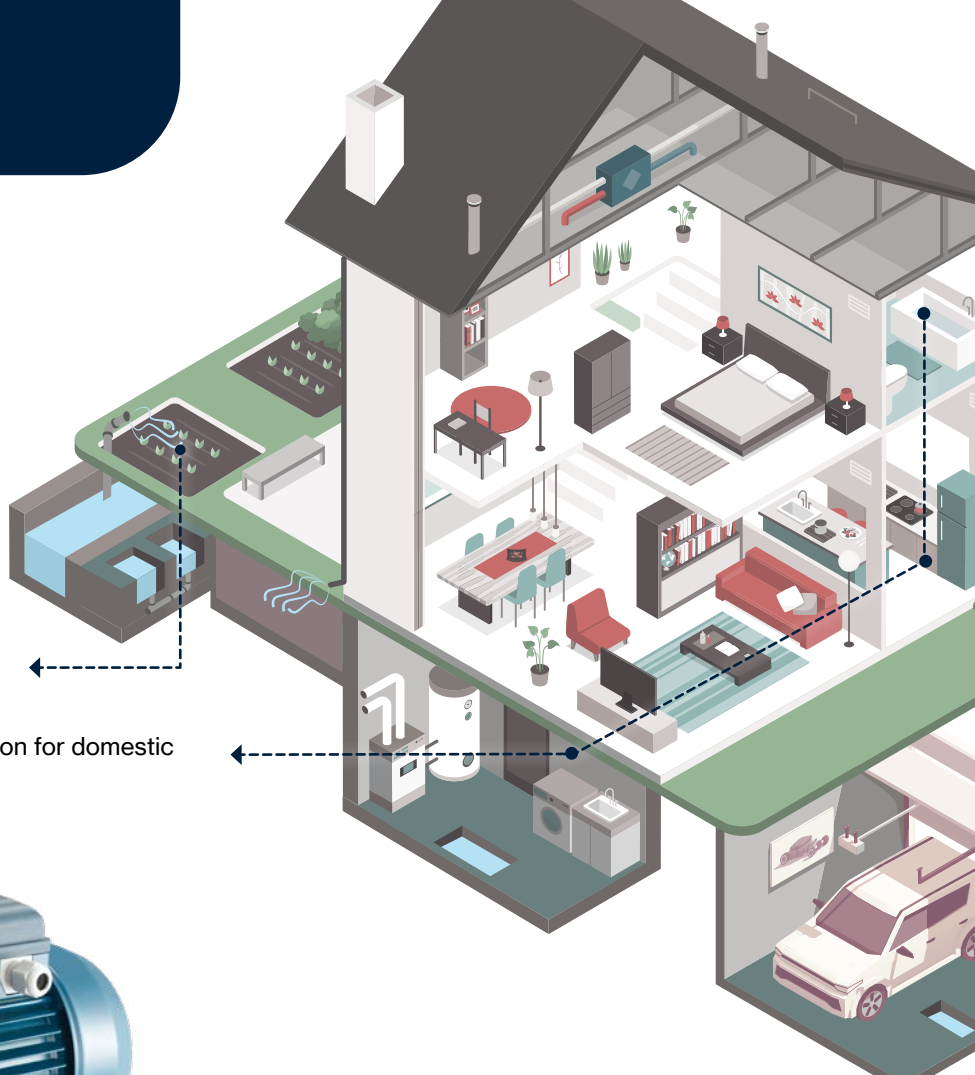

AP 100



APT 200

SPECIFICATIONS

Pump Body	Cast iron
Motor bracket	Cast iron or aluminum (AP 75÷100), Cast iron (AP 150÷200)
Impeller	Noryl® or brass
Mechanical seal	Ceramic-Graphite
Motor shaft	Steel AISI 416 (AP 75÷100) Steel AISI 303 hydraulic part (AP 150÷200)
Liquid temperature	0-50 °C
Operating pressure	Max 8 bar
Insulation class	F

PLUS & PERFORMANCE



Motor shaft in AISI 416



High pressure at low flow



Low consumption