


## WHAT IS IT

Peripheral positive displacement pump with front suction (PM) and side suction (PM A) for small household systems and simple industrial applications; characterised by a considerable ratio between performance and required output.

## MAIN USES



Water supply and pressurization for domestic and residential installations

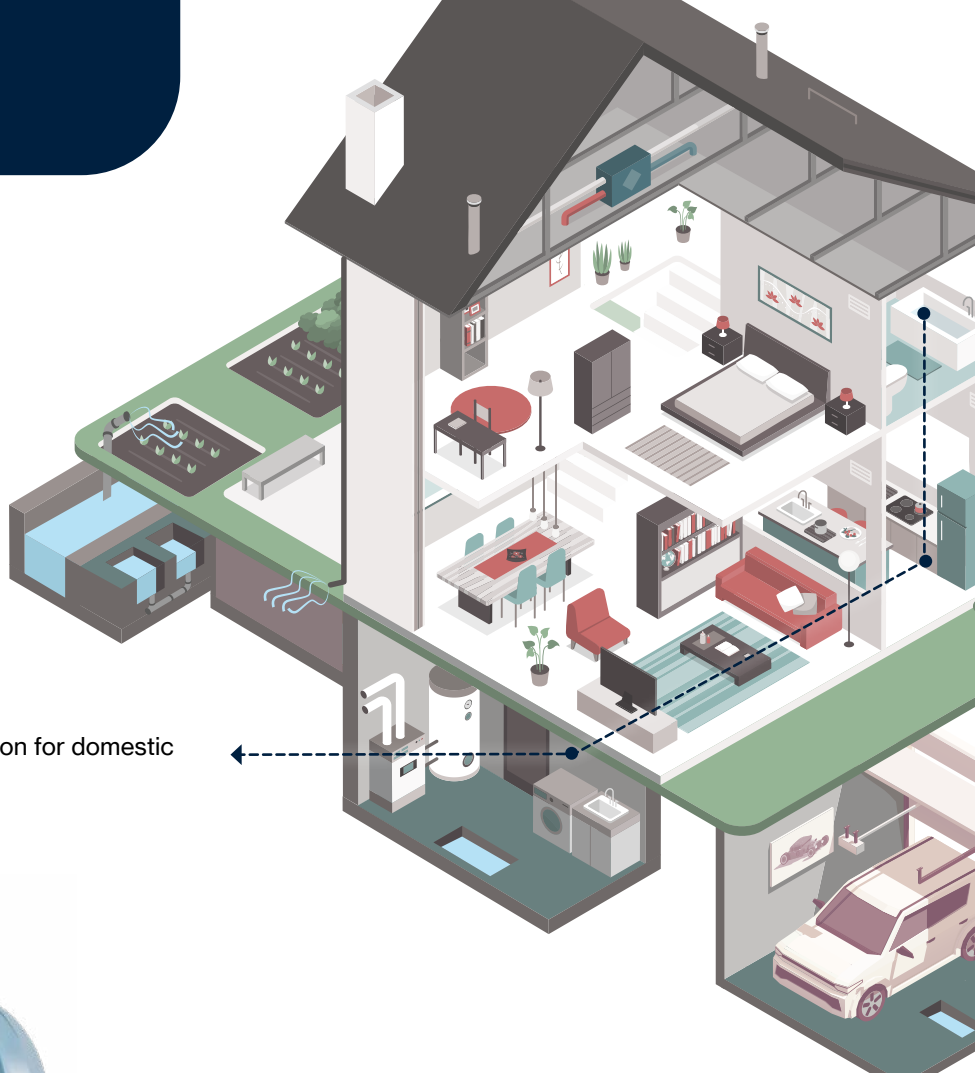

**PM/BR**



**PM A**

Also available in self-priming version

## SPECIFICATIONS

<b>Pump Body</b>	Cast iron, bronze (45BR)
<b>Motor bracket</b>	Cast iron, cast iron or bronze (45BR)
<b>Impeller</b>	Brass
<b>Mechanical seal</b>	Ceramic-Graphite-NBR
<b>Motor shaft</b>	Stainless steel AISI 416
<b>Liquid temperature</b>	0-90 °C
<b>Operating pressure</b>	Max 6 bar (45) Max 8 bar (65, 80) Max 9 bar (90)
<b>Insulation class</b>	F
<b>Protection degree</b>	IPX4

## PLUS & PERFORMANCE



Motor shaft  
in AISI 416



High  
pressure at  
low flow



Low  
consumption